


HIGH-LOADER MTKA

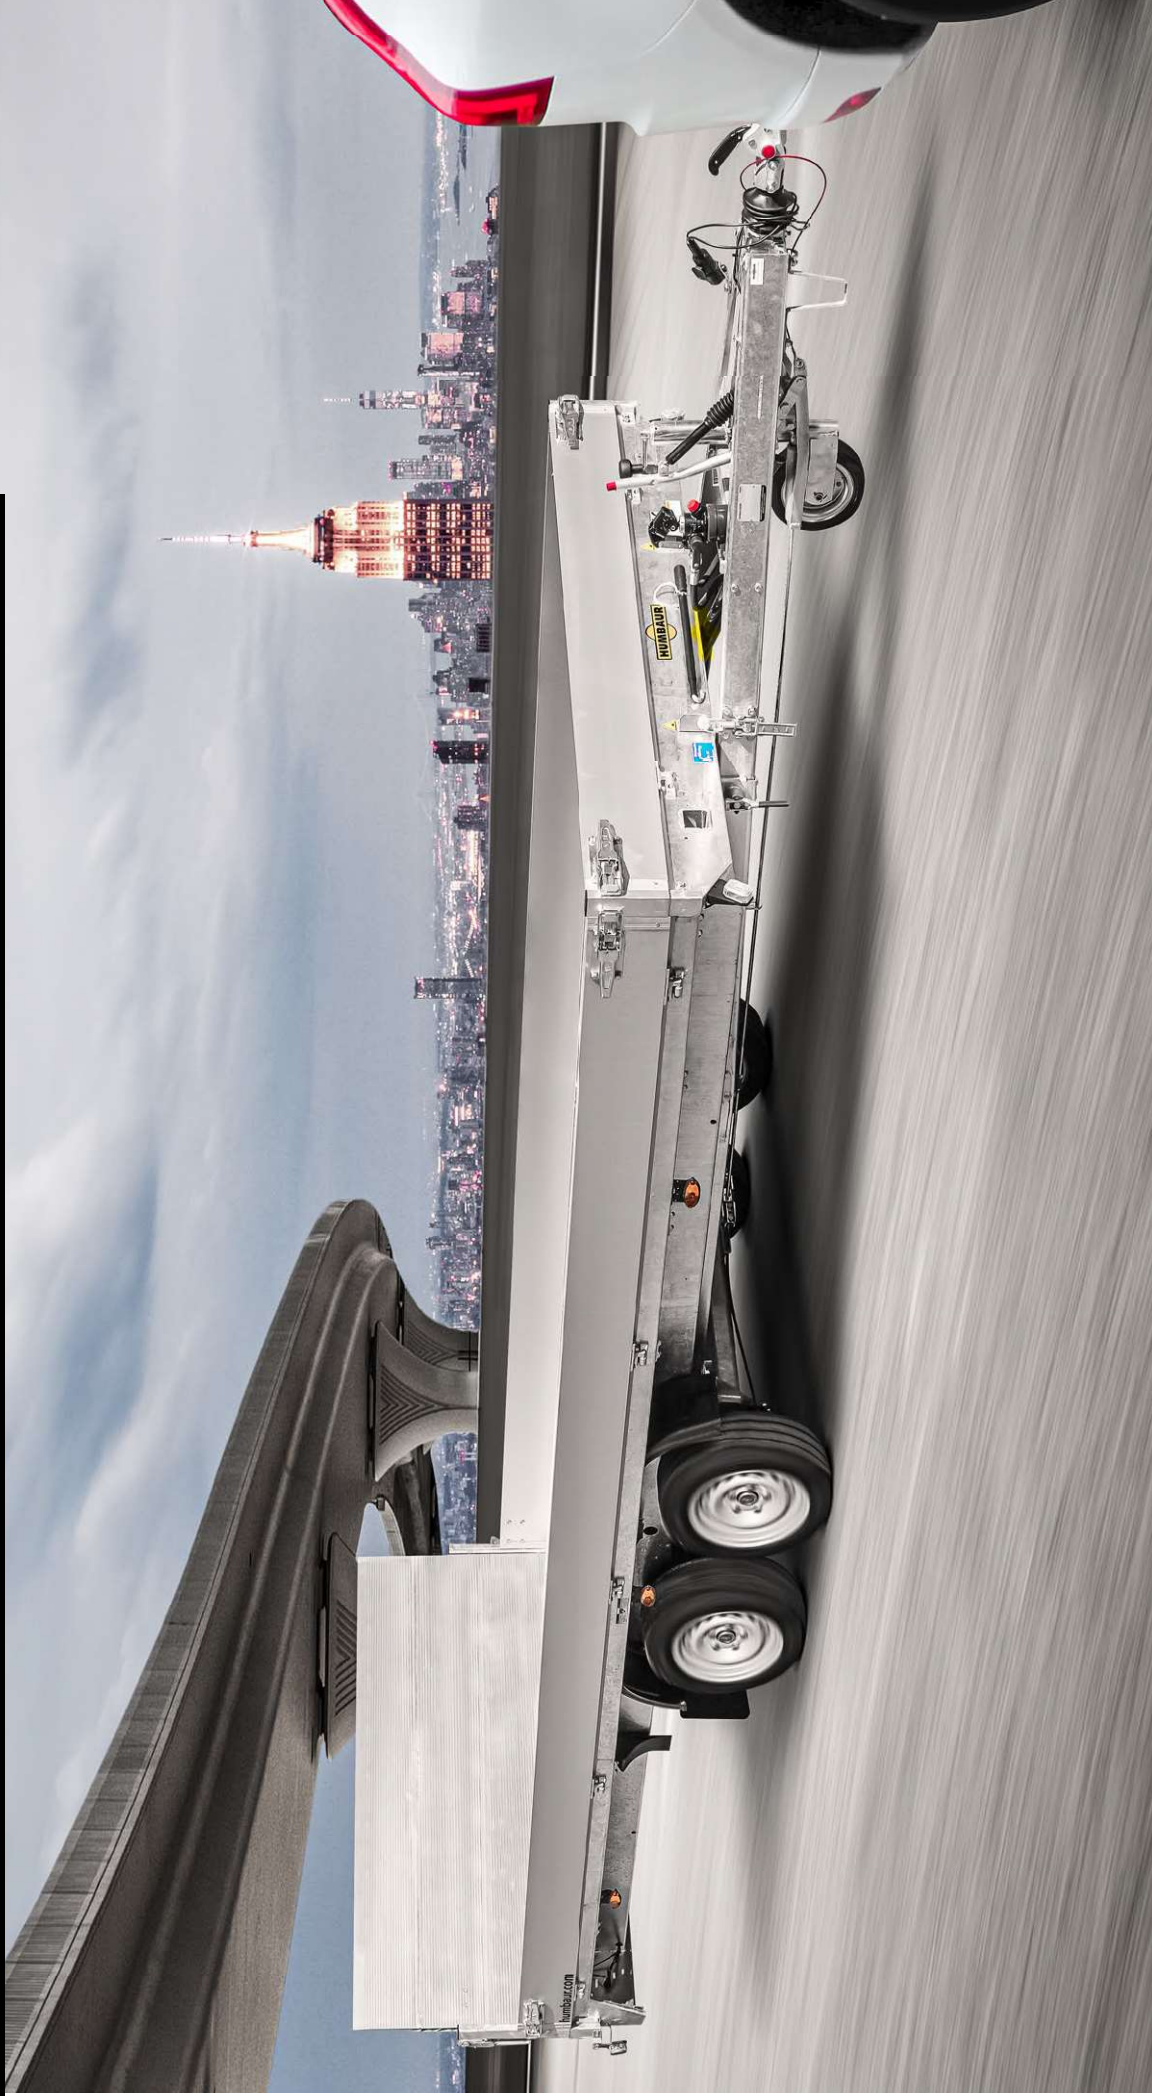

MTKA

Convenient and easy loading and unloading of the trailer

It makes every operation as comfortable as possible for you: You simply tilt the hydraulic bridge with a hand pump, gas springs support you in operating the ramp wall. Thanks to the low loading height of 650 mm (tandem axle), the ramp angle remains very flat. A stable, optionally available winch stand with cable winch is available so that you can easily get the vehicles onto the trailer. The sophisticated chassis technology of the MTK Allcomfort ensures exceptionally smooth handling.



MTKA 355522

Hochlader MTKA

Total permissible weight in kg	Model	Overall dimension in mm	Internal dimensions in mm	Load capacity in kg	Load height in mm	Tyres in inches	Ramp angle
3000	MTKA 304222	5750 x 2305 x 1690	4200 x 2180 x 200	2130	650	13	10
3500	MTKA 354222	5750 x 2305 x 1690	4200 x 2180 x 200	2580	650	13	10
3500	MTKA 354722	6250 x 2305 x 1690	4700 x 2180 x 200	2535	650	13	9



ACCESSORIES (OPTIONAL)

- Fitted wheel shock absorbers
- 2 x cantilever rods for tailgate, loose
- 350 mm-high aluminium side panels
- Five-way adjustable cable winch
- Adjustable electric cable winches
- Aluminium floor instead of wooden floor

IMPORTANT DETAILS

- Bolted, hot-dip galvanised chassis
- Welded, hot dip galvanised tilting bridge
- Double-acting cylinder for tilting the loading area
- Ramp gate, perforated with pneumatic spring support
- Side panels made if anodised aluminium
- Load securing points in the outer frame with 400 kg of lashing capacity
- Optional five-way transversely adjustable cable winch
- Base plate, 18 mm thick and wheater resistant

MTKA 354722 with 350mm high drop sides, available as an option



Special stability due to double hat profiles in transverse direction on the bridge

